



DIMENSIONS:

A	5.281" ±0.063
B	5.721" ±0.125
C	6.361" ±0.063
D	4.250" ±0.063
E	4.125" ±0.063
G	0.281" x 0.750" ±0.015

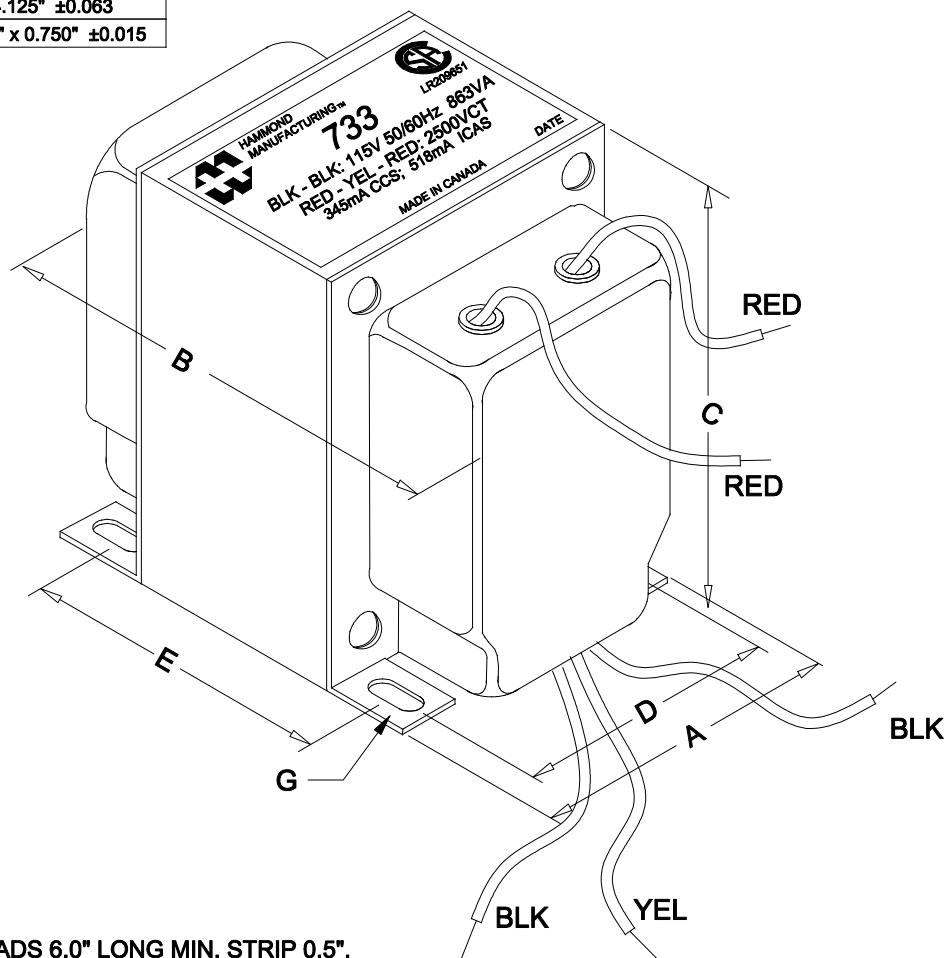

NOTE: ALL LEADS 6.0" LONG MIN. STRIP 0.5".

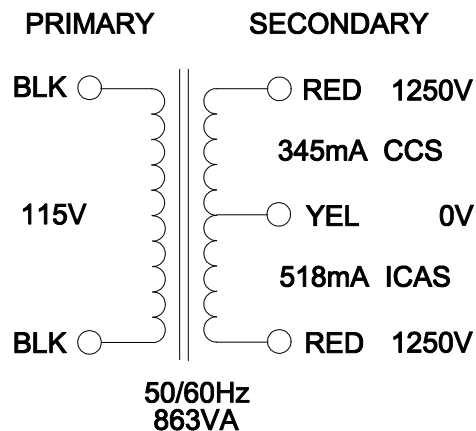

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	378mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	RED - RED =	2570.6V ±2%
	RED - RED/YEL = RED/YEL - RED =	1285.3V ±2%
DCR	@ 20°C, BLK - BLK =	0.201 Ω ±20%
	@ 20°C, RED - RED =	114.3 Ω ±20%
HIPOT	PRIMARY - SECONDARY	4500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED. C.I.	09/13/18	ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5 PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PLATE TRANSFORMER	DWG. NO. 733
			DATE: 09/13/18	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		