
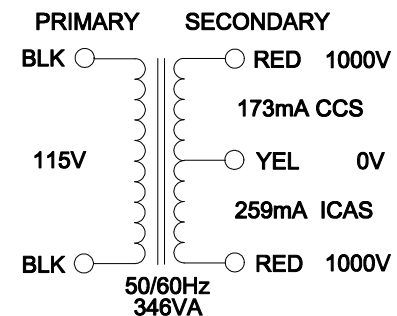


DIMENSIONS:	
A	3.750" ±0.063
B	4.813" ±0.125
C	4.530" ±0.063
D	3.000" ±0.063
E	3.688" ±0.063
G	0.203" x 0.375" ±0.015

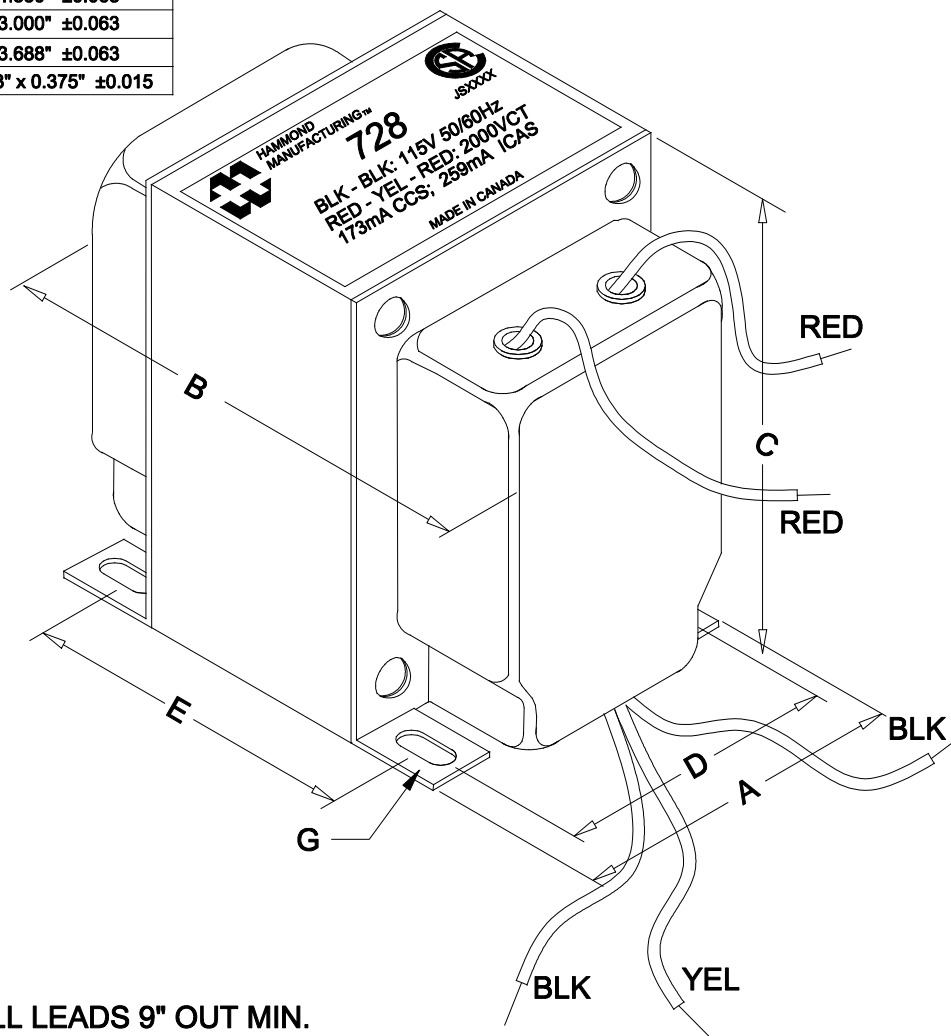

NOTE: ALL LEADS 9" OUT MIN.

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	457mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	RED - RED =	2093.0V ±2%
	RED - RED/YEL = RED/YEL - RED =	1046.5V ±2%
DCR	@ 20°C, WHT - BLK =	1.500 Ω ±20%
	@ 20°C, RED - RED =	350.0 Ω ±20%
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED. C.I.	07/13/21	ELECTRONIC DIVISION			
			52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PLATE TRANSFORMER	DWG. NO. 728
			DATE: 07/13/21	APP'D. BY: DIMENSIONS: IN(X) MM()		